




# Allwetter in the thicknesses: 68, 74 mm

CE EN 14351-1

- for covering coating
- translucent surfaces in many types of wood
- high sizes
- sound insulation

Tested accord. to DIN EN 1121  
Test climate **c, d, e** from 68 mm class 3 (c), 3 (d), 3 (e)  
acc. to DIN EN 12219:2000-06  
Burglar resistance RC2/RC3, external door acc. to EN 14351-1

Standard sizes:	Reducible to:	- size up to 3080 x 1240 mm of request
2470 x 950 mm	2250 x 850	
2470 x 1050 mm	2250 x 950	- max. tested size:
2470 x 1150 mm	2250 x 1050	<b>2800 x 1240 mm</b>

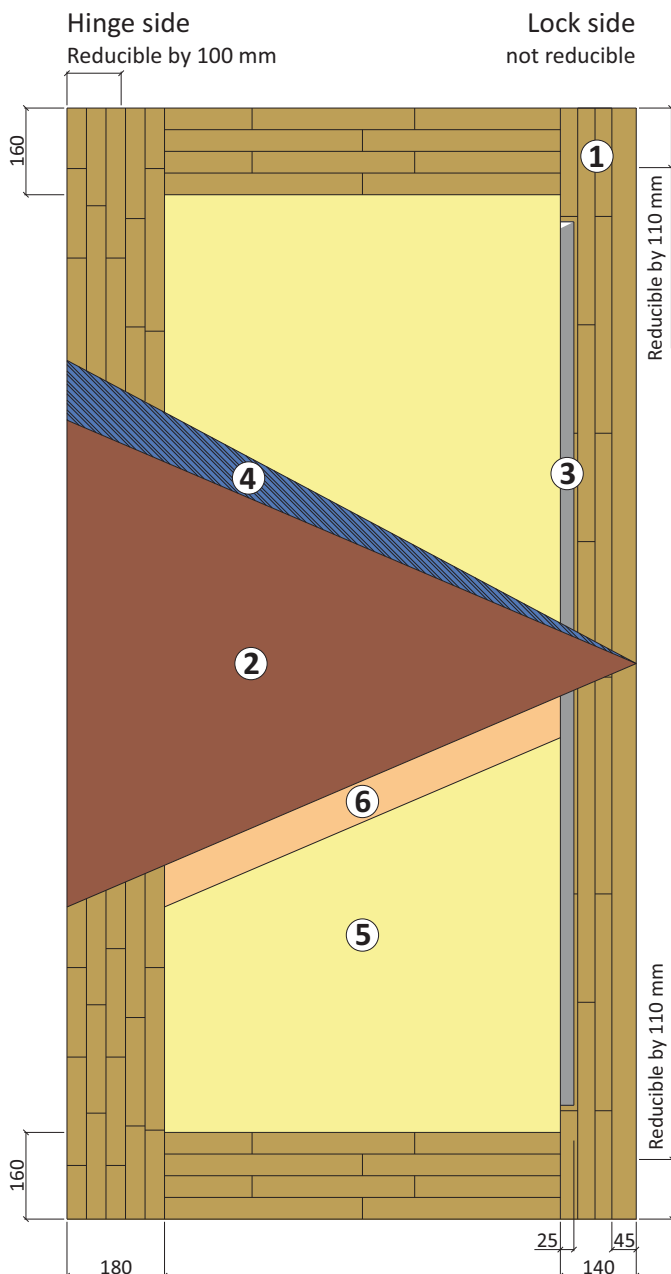

## 1. Wing frame

- **Lock side:** lamellas in type of wood/colour matching the covering layer. Width approx. 45 mm, glued to inner frame
- **Hinge side:** flawless glulam timber concealed edge band, finger jointed as reduction area, type of wood as lock side
- **Above:** 160 mm flawless glulam timber concealed edge band as reduction area, type of wood as lock side
- **Below:** 160 mm glulam timber concealed edge band according to factory's choice

**2. Covering layers** (see at page 22 „Plywood covering layers“ data sheet no. 515)  
Plywood Exterior glued according to DIN EN 314, class 3, MDF-Exterior with a thickness of 3 mm. **Water-repellent treatment of MDF with VARIOTEC Protekt, data sheet no. 471.** HPL wating acc. to Exterior collection.

**3. FKV technology (Fibre-plastic composite)** as a metal-free reinforcement.

**Thermal insulation PUR construction core, free of CFC.**

Door thickness in mm	68	74
Sound insulation $R_w$ in dB „standard design“	30	34
$U_p$ -value in $W/(m^2K)$	0,96	0,91
Sound insulation 1 $R_w$ in dB „increased sound insulation“	37	38
$U_p$ -value in $W/(m^2K)$	1,00	0,95
Sound insulation 2 $R_w$ in dB „pergola“	42	44
$U_p$ -value in $W/(m^2K)$	1,2	1,1
$U_p$ -values for size 2250 x 1050 mm		

**4. ASS Stabilisation layers** on both sides as vapour barrier gluing stiff against shearing and tension.

## 5. Core insulation

PUR construction core, free of CFC, construction biologically tested, recyclable. Jointless and non-positive directly foamed and thus **without thermal bridges.**

## 6. Internal reinforcement (insert)

Standard: **MFP** (multifunction panel) as a reinforcement for cutouts or as a basis for glazing beads, false edges and glazing beads on both sides. Option: Insert in **plywood** or **MDF** for glazing beads on one side.

**Reducible** in heig by 220 mm (minimum width of the glulam timber concealed edge band 50 mm), from case to case reducible in width by 100 mm only on the **hinge side**. Please take into account ground seal + rabbet design before reducing.

## Internal measurements for cutouts/10 mm reserve per side

- with width 950 : 610 mm
- with width 1050 : 710 mm
- with width 1150 : 810 mm

## PUR gluing of he whole construction.

The functionality, withstand capability, weathering qualities of the surfaces, and all the other characteristics which can be expected of an entry door, depend on the adherence of technical guidelines, coatings on dimensionally stable external parts made of wood, especially on windows and outside doors. Leaflet no. 18 and VOB (German Construction Contract Procedures) part A 10.3 as well as the RAL quality and test requirements for the construction of wooden entry doors RAL GZ 996. The application recommendations for external building elements from the ift-Rosenheim and VFF-Frankfurt am Main, as well as the guidlines of the EN 14351-1:2006+A1:2010 have imperatively to be maintained.

