

All-inclusive kit

Professional subsequent treatment of components (amended **DIN 68800 part 1 + 3**)


VARIOTEC Blind frame construction will be delivered disjointed.

The blind frame has to be professionally glued by the client. The definition which wood preservative will be used and the type of gluing of the corner joint has to be agreed and carried out with the respective system donor on one's own responsibility.


We inform that the single components of the frame

have to be treated with an appropriate wood preservative before gluing them.

Background is the amended **DIN 68800 part 1 + 3**, that prescribes this preventive wood protection for dimensionally stable external components.

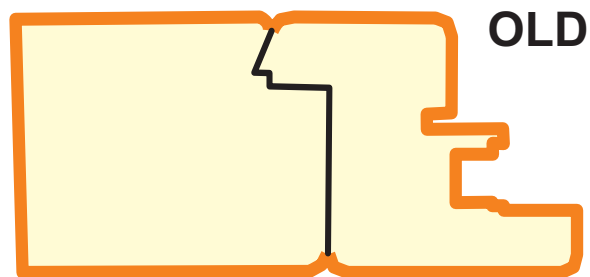

No protection at the interior of the corner joint

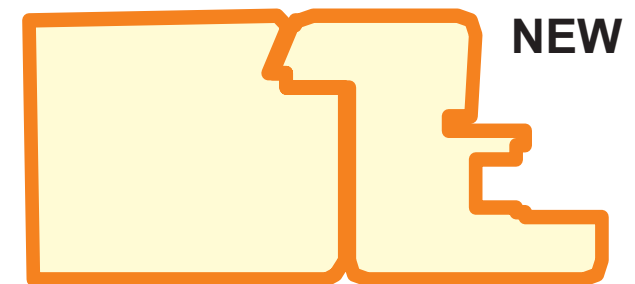

Protection at the interior of the corner joint