

All-inclusive checklist





All-inclusive
construction set!





**Put your individual
„all-inclusive“ construction set together!**

...or simply fill the form out online at:
www.variotec.de ⇒ ***Door configurator***

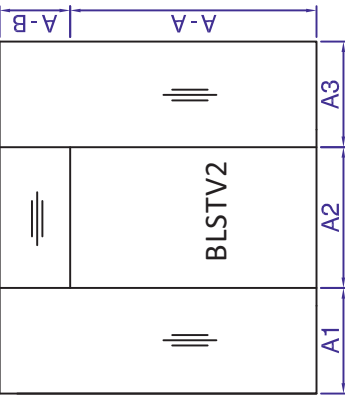


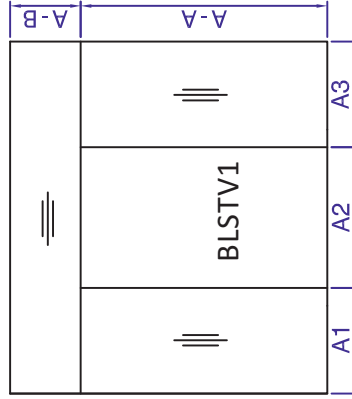


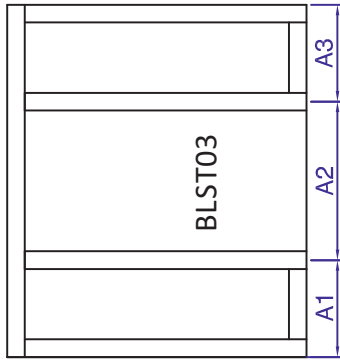


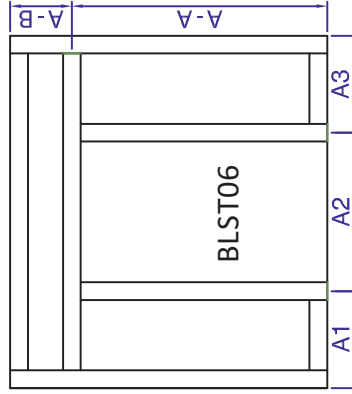


Inside micrometer S1




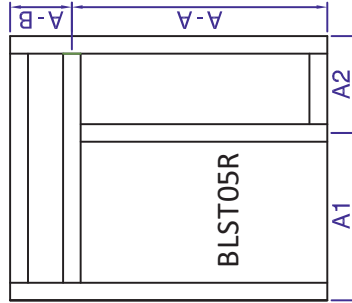



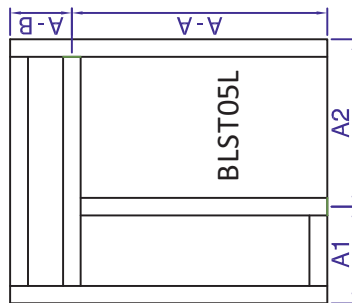







Contact partner / phone / mail


Timber retailers:

Query Order

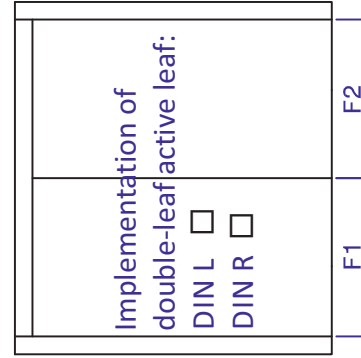


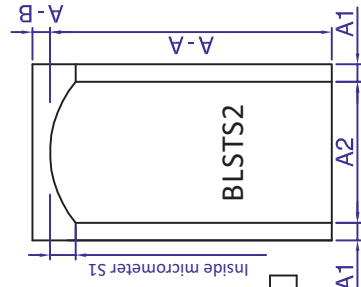


Inside micrometer S1

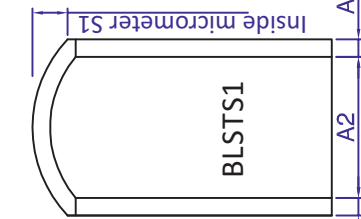

Inside micrometer S1

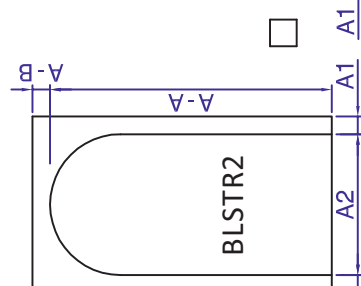

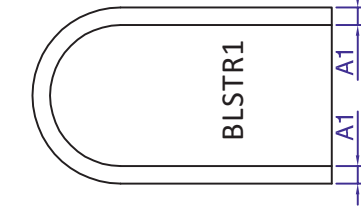



Orders / queries to: verkauf@vartotec.de

AI-CHECKLIST

Surface/Wood types

For covering surfaces

- Surface layer
 MDF-Ext.
 Redwood fineline

Edge band

- Redwood
 Pine

For varnished surfaces

- Surface layer
 Meranti fineline
 Larch fineline
 Pine fineline
 Spruce fineline
 Oak sliced veneer

Edge bands

- Redwood
 Larch
 Pine
 Spruce
 Oak

Design

- Veneered widthways
 Book-matched veneered wood

For construction-side veneering

- yes no
veneered diagonally)

Rustic

- knotted
 rough-sawn
 vintage
 oak matured timber
 coastal oak
 wild oak
 oak barrique*

Inside

- Inside

Outside
Note: There may be differences in the colour and structure of plywood surfaces and solid wood, this does not represent a grounds for complaint.

*available from Scheba GmbH, 85283 Eschelbach (info@scheba.net)

Fittings

Rebated entry door hinge

- BAKA protect 4010 3D FD top zinc
 BAKA protect 4010 3D FD stainless steel

Heavy-duty hinge

- VX7939/160 3D FD MSTs stainless steel

Flush-mounted main door hinge

- VX 7859-160 FD stainless steel (hinge visible)
 Tectus 640 3D (concealed)
 VX 7729/160-4 HA (wood/aluminium, opens outwards)

Hinge-side security

- KFV type 8042

Silicon sealant

- black grey white

Locking systems

- 65 mm 80 mm backset
 GU SECURITY MR2 (manual threefold lock)
 with blocking clip (door crack protection)
 E-opener

Note: if no specific backset is selected the 65 mm backset will be, manufactured

- Syring contact pressure fitting

- GU SECURITY Automatic (automatic/mechanical locking)
 A-opener (motorised unlocking)

- Door release with daytime release system + electric door opener roller latch no. 5 with triangular latches

- Locking systems for doors in escape and emergency routes as per German Industrial Standards DIN EN 179 and 1125

- Panic function E
 Panic function B

Latchkey hole drilling: only inside throughout

Upper door closer: provided with slide rail integrated

Fixed leaf lock

- Shootbolt (2x)
 BKS 1899 Cremone Lock
 BKS 2189 Cremone Lock
(full panic function with 2 leaves)

Power carrier

- eff-eff, calbe transfer, gluggable, 10-pole
 cordless Secure Connect 200
 cordless Secure Connect 50

ekey set fingerprint

- ekey set scanner + cable transfer incl. integr. control unit (1 relay) for installation in the door leaf

ekey set

- combi „GU+ekey“

GU SECURITY Automatic A-opener


- cordless Secure Connect 200 fingerprint or code keyboard (ekey)



Sketch (cutouts, design millings)

(EXTERNAL PLAN)

from outer edge of door leaf

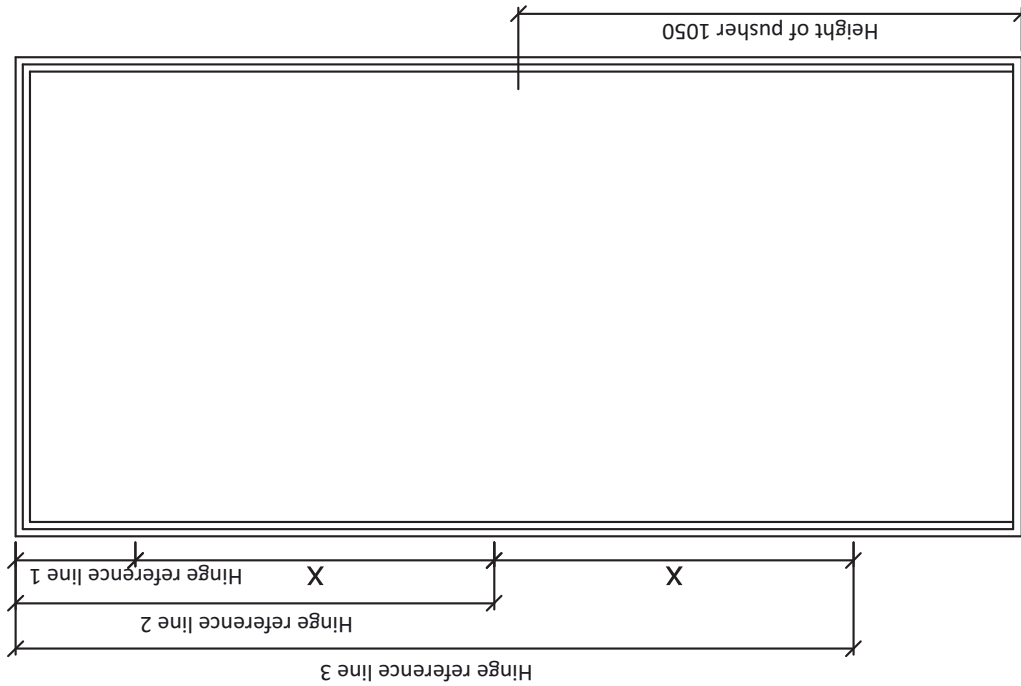



Cutouts

- Glazing beads on both sides, inside + out Glazing beads on one side, inside without cutout



Glazing beads (profile 39 loose pipe sections, from profile 40 joined frames)

- Profile 39 Profile 40 Profile 41 Profile 42 Profile 43 Mullion 40 Mullion 42 Mullion 43




- Glass thickness: _____ mm Wood type: Meranti Larch Pine Spruce Oak
 Glazing tape inside _____ mm outside _____ mm Weatherboarding 80 x 30 mm Base plate (stainless steel 1,5 mm, embedded)
 with silicone rebate Yes No Crown profile Height: _____

Design millings outside inside

- Smartline 18 mm Smartline 8 mm V-JOINT 90° (depth 2 mm) Flattening, infill look Shadow groove 10 mm
 with splashback

- Spy hole drilling Height: _____ (standard height 1400 mm from UKTB)

Diameter: _____

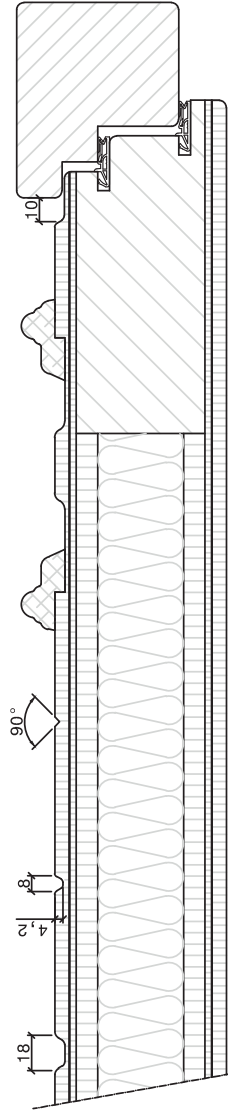

Send form

AI-CHECKLIST

page 4